

Power supply 160 mA with integrated choke

Order no.: 2120 00

Power supply 320 mA with integrated choke

Order no.: 2122 00

Power supply 640 mA with integrated choke

Order no.: 2130 00

Power supply 1280 mA with integrated choke

Order no.: 2138 00

Operating instructions

1 Safety instructions



Electrical devices may only be mounted and connected by electrically skilled persons.

Serious injuries, fire or property damage possible. Please read and follow manual fully.

Danger of electric shock. During installation and cable routing, comply with the regulations and standards which apply for SELV circuits.

These instructions are an integral part of the product, and must remain with the end customer.

2 Device components

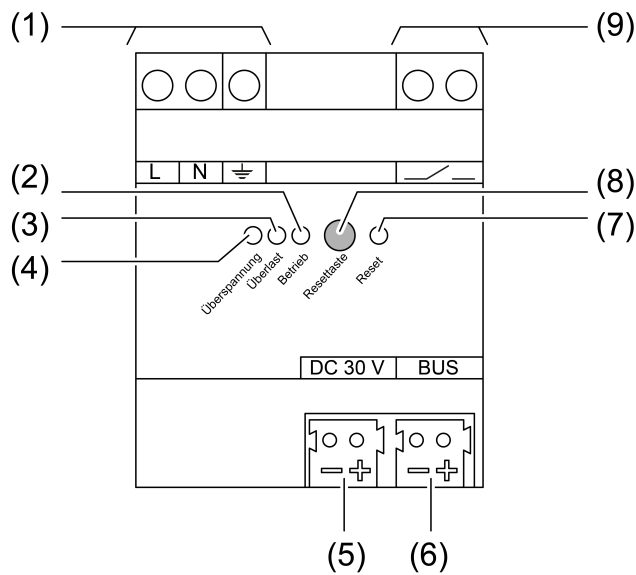


Figure 1: View

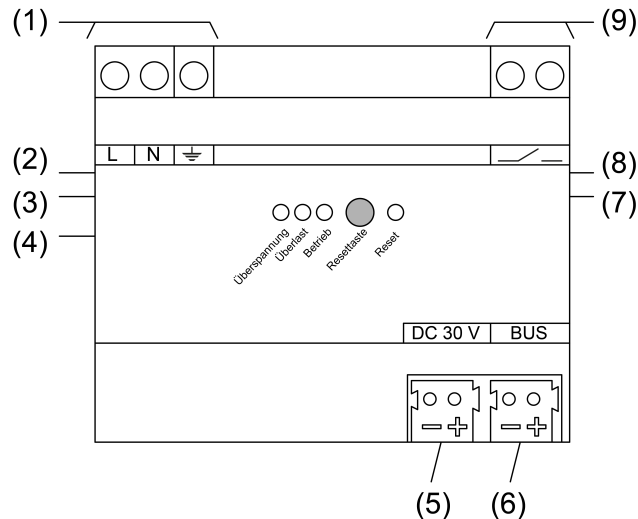


Figure 2: 1280 mA power supply – view

- (1) Connection of mains
- (2) LED **Betrieb**, green
On: Normal operation
Flashes: Overload or overvoltage
Off: No mains voltage or internal error
- (3) LED **Überlast**, red
On: Overload or short-circuit on KNX bus line or output **DC 30 V**
- (4) LED **Überspannung**, yellow
On: Overvoltage on KNX bus line or output **DC 30 V**
- (5) Output **DC 30 V**
- (6) Output **Bus** for KNX bus line
- (7) LED **Reset**, red
Flashes rapidly 2.5 Hz: Reset for 20 seconds
Flashes slowly 0.25 Hz: Permanent reset
- (8) Button **Reset**
Acknowledge the diagnostic message: Press briefly, < 0.5 seconds
Switch off the KNX bus line for 20 seconds: Press between 2...4 seconds
Permanently switch off the KNX bus line: Press longer than 4 seconds
Terminate the permanent reset: Press the button
- (9) Signal contact for diagnostic message
Closed: Normal operation
Open: After overload, overvoltage or in case of a power failure

3 Function

System information

This device is a product of the KNX system and complies with the KNX directives. Detailed technical knowledge obtained in KNX training courses is a prerequisite to proper understanding.

Intended use

- Supplying KNX devices with bus voltage
- Supplying devices with direct current
- Mounting on DIN rail according to EN 60715 in sub-distribution unit

Product characteristics

- Output with integrated inductance for supplying KNX bus lines
- DC 30 V output for supplying additional devices

- Nominal current can be subdivided to outputs as desired
- Reset button
- Short-circuit proof
- Overvoltage proof
- No-load proof
- Suitable for operation in systems with emergency power supply
- Potential-free signal contact for operating and diagnostic message
- Two identical power supplies can be connected in parallel (with the versions 160 mA, 320 mA and 640 mA)

4 Operation

Acknowledging the diagnostic message

After detecting a overvoltage or a short circuit the LED and the signal contact signal the event until the message is acknowledged.

- Press the Reset button for less than 0.5 seconds.

LED functions and signal contact

	LED Betrieb (2), green	LED Überlast (3), red	LED Überspan- nung (4), yel- low	LED Reset (7), red	Signal contact (9)
Normal opera- tion	on	off	off	off	closed
Reset for 20 seconds	on	off	off	flashes 2.5 Hz	closed
Permanent re- set	on	off	off	flashes 0.25 Hz	closed
Overvoltage	flashes 0.5 Hz	off	on (until the message is acknow- ledged)	off	open (until the message is acknow- ledged)
Overload, short-circuit	flashes 0.5 Hz	on (until the message is acknow- ledged)	off	off	open (until the message is acknow- ledged)
Voltage failed / internal error	off	off	off	off	open

In normal operation the control of the power supply is not necessary. The button (8) is recessed and thus prevents that it is inadvertently actuated in operation.

Reset function and Reset button

When resetting a bus segment, the output voltage of the power supply is switched off. At the same time the bus line is short-circuited so that all connected bus devices are disconnected from the bus voltage.

Resetting the bus line for 20 seconds

- Press the **Reset** button (8) between 2 ... 4 seconds.
The bus line is short-circuited for 20 seconds.
The LED **Reset** (7) flashes quickly.
After 20 seconds the bus voltage is switched on again and the LED **Reset** switches off.

Permanently resetting the bus line

- Press the **Reset** button (8) for more than 4 seconds.
The bus line is short-circuited.
The LED **Reset** (7) flashes slowly.

Terminating the permanent reset

Prerequisite: The bus line is permanently reset, the LED **Reset** (7) flashes slowly.

- Press the **Reset** button (8).
The bus voltage is switched on again and the LED **Reset** switches off.

5 Information for electrically skilled persons

**DANGER!**

Mortal danger of electric shock.
Disconnect the device. Cover up live parts.

5.1 Fitting and electrical connection

**DANGER!**

Electrical shock when live parts are touched.
Electrical shocks can be fatal.
Before working on the device, disconnect the power supply and cover up live parts in the working environment.

Fitting the device

Observe the temperature range. Ensure sufficient cooling.

- Mount the device on DIN rail. The terminals for the mains connection (1) must be at the top.

Connecting the device to mains voltage and bus

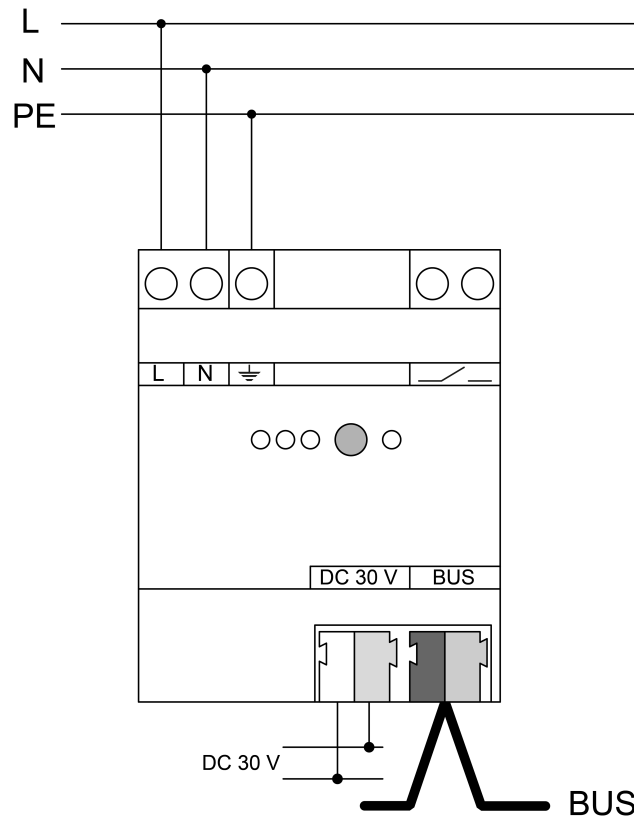


Figure 3: Wiring example – mains voltage and bus line

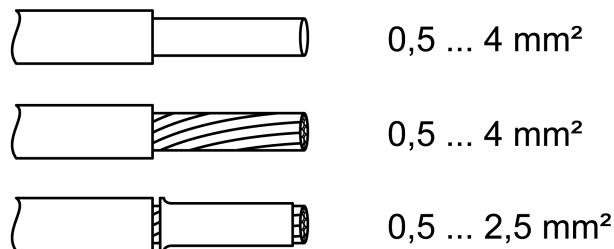


Figure 4: Clampable conductor cross-section

- Connect the mains voltage to the terminals **L** and **N** (1).
 - Connect the protective conductor **PE** to the terminal \perp .
 - Connect the KNX bus line to output **Bus** (6).
 - Install the cover to protect the bus connection against hazardous voltages in the connection area.
- i** The total load of the outputs can be subdivided as desired. Do not exceed the total rated current.
- i** Do not connect any other products to the bus output. This might influence the bus communication.
- i** If required, an identical power supply can be connected in parallel for the device variants 160, 320 and 640 mA.

Connecting the diagnostic analyser

The power supply signals mains failure, overvoltage, overload and short circuit using a potential-free contact (9). A monitoring device can detect the switching status and forward it for diagnostic purposes.

i The signal output serves only for signalling purposes and may not be used as a load output.

A signal lamp, a signal relay or, e.g., a KNX binary input connected to a KNX bus line can be used as monitoring device.

- Connect the signalling device according to the connection example (Figure 5).

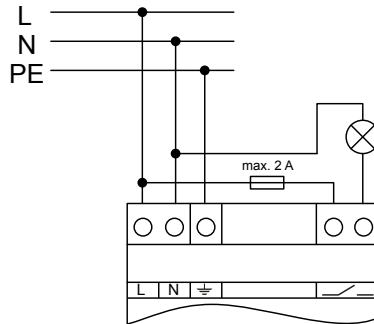


Figure 5: Application example – signal lamp for optical operating display

- Connect the KNX binary input according to the connection example (Figure 6).

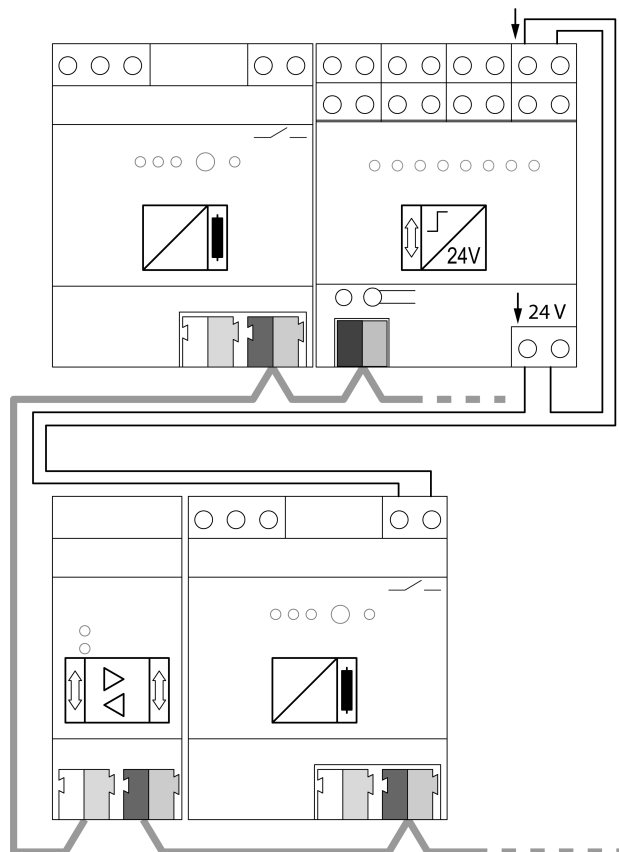


Figure 6: Application example – KNX binary input on main line for detecting and centrally signalling diagnostic messages

i Observe the wiring! Install the cables for the signal contact such that no loops are created. During operation loops can cause interference voltages to be coupled into.

Operation with emergency power systems

The power supply can be used in combination with centrally supplied emergency power systems. In this way, the function of the KNX system and the control of the most important functions can be ensured in emergency operation.

- i** Statutory and standard specifications for emergency power and emergency lighting systems vary from country to country. In any event, the user / technical planner must check whether the specific specifications are observed.

Cable lengths

For KNX line segments and power supplies the following rules apply:

- Bus line length per lin segment: Max. 1000 m
- Bus line length between power supply and KNX bus subscriber: Max. 350 m
- Bus line length between two KNX bus subscribers: Max. 700 m

6 Technical data

Rated voltage	AC 220 ... 240 V~
The device is operable in the range of 180 V AC ... 264 V AC.	
Mains frequency	50 / 60 Hz
Power loss (max. load on all outputs)	
Art. no. 2120 00	max. 1.5 W
Art. no. 2122 00	max. 1.8 W
Art. no. 2130 00	max. 2.9 W
Art. no. 2138 00	max. 6.4 W
Efficiency	
Art. no. 2120 00	approx. 76%
Art. no. 2122 00	approx. 84%
Art. no. 2130 00	approx. 87%
Art. no. 2138 00	approx. 86%
Rated voltage DC	DC 240...250 V
KNX	
KNX medium	TP256
Bus output voltage	DC 28 ... 31 V SELV
Output current	
Art. no. 2120 00	160 mA (all outputs)
Art. no. 2122 00	320 mA (all outputs)
Art. no. 2130 00	640 mA (all outputs)
Art. no. 2138 00	1280 mA (all outputs)
Short-circuit current	
Art. no. 2120 00	max. 1 A
Art. no. 2122 00	max. 1 A
Art. no. 2130 00	max. 1.5 A
Art. no. 2138 00	max. 3 A
Connection type for bus	device connection terminal
Parallel operation with identical power supply	
Art. no. 2120 00	Yes
Art. no. 2122 00	Yes

Art. no. 2130 00	Yes
Art. no. 2138 00	No
Output DC 30 V	
Output voltage	DC 30 V
Signal output	
Switching voltage AC	AC 12 ... 230 V~
Switching voltage DC	DC 2 ... 30 V
Switching current	5 mA ... 2 A
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-25 ... +70 °C
Relative humidity	max. 93 % (no condensation)
Fitting width	
Art. no. 2120 00	72 mm / 4 module
Art. no. 2122 00	72 mm / 4 module
Art. no. 2130 00	72 mm / 4 module
Art. no. 2138 00	108 mm / 6 module
Connection mode	device connection terminal
Finely stranded with conductor sleeve	0.5 ... 2.5 mm ²

7 Warranty

The warranty is provided in accordance with statutory requirements via the specialist trade. Please submit or send faulty devices postage paid together with an error description to your responsible salesperson (specialist trade/installation company/electrical specialist trade). They will forward the devices to the Gira Service Center.

Gira
Giersiepen GmbH & Co. KG
 Elektro-Installations-
 Systeme

Industriegebiet Mermbach
 Dahlienstraße
 42477 Radevormwald

Postfach 12 20
 42461 Radevormwald

Deutschland

Tel +49(0)21 95 - 602-0
 Fax +49(0)21 95 - 602-191

www.gira.de
 info@gira.de